

PKCELL[®]
Green energy, easy life



Shenzhen PKCELL battery Co.,Ltd.
is one of largest battery manufacturing enterprises
in China for its biggest production

PKCELL[®]
Green energy, easy life

SHENZHEN PKCELL BATTERY CO.,LTD

Address : 4th Building,Meitai Technology Park,Guanguang Road,Longhua,
Shenzhen,China.518110

Tel: 86-755-86670672(switchboard)

Fax: 86-755-86670609

Website: www.pkcell.com

For retailing: www.pkcellshop.com

E-mail: pkcell@pkcell.com



www.pkcell.com

1998-2018

COMPANY MILESTONES

2018

2016

2014

2011

2009

2006

2003

2001

1998

Established in 1998, PKCELL developed high efficient Carbon Zinc battery , and then the first PKCELL battery came into being.



With the introduction of Japanese quality management system, new environmental friendly zinc chloride and alkaline batteries were sold as industrial supporting products.



Confirmed "To make PKCELL as Chinese first class battery brand" as strategic target formally, and set up exhibition booths in the major electronic shows abroad to develop overseas business vigorously.



Put the first rechargeable battery product line into production and got ISO9001 Quality Management Certification in the same year.



PKCELL entered international market formally, put efforts to build a sales circle with Europe&America as center and extending to Asia, Africa and Oceania.



Researched and developed new product in hi-tech battery field-power bank, which made PKCELL the pioneer of power bank in Asia



Set up brand department and exert strength to make PKCELL a first-class battery brand in the world. With the upgrading of all products, PKCELL entered a new milestone.



Set up Branch in USA and Canada



Further R&D of lithium batteries



CONTENTS

Began in 1998

COMPANY PROFILE

Shenzhen PKCELL Battery Co.,Ltd

Shenzhen Pkcell Battery Co. Ltd is one of the largest battery manufacturing enterprises in China for its biggest production scale, most advanced equipments and fullest ranged product varieties. The workshop and office are set up in four huge buildings with total gross floor area of 28,000 square meters. Pkcell has about 400 staff including 30 professional technicians and 50 quality management personnel. Equipped with about 18 sets high speed automatic production lines and quality inspection equipment. Our annual battery output is up to 500 billion pieces.

We mainly produce alkaline battery, super heavy duty battery, alkaline button cells (AG) and lithium button cells (CR), LI-SOCL2 battery, LI-MnO2 battery, NI-MH/NI-Cd rechargeable battery and chargers. Those products are widely used in the industry of telecommunication, digital products, MP3, R/C toys, medical instruments, lightening devices and household application etc.

1 NO MOQ, any quantity is ok.

2 Promise 10pcs replacement for 1pcs defective battery.

3 2 Million US dollar Products Liability Insurance.

4 Best service, have branch in United States and Canada.

5 Professional marketing, selling training and advice.

6 Free promotion items.

Why Choose Us ?

BRAND STORY PKCELL

COMPANY PROFILE

ADVANTAGES

DEVELOPMENT

PRODUCTS DISPLAY

PARTNERS

FUTURE PROSPECTS

PKCELL Product Safety Promise:

PRODUCTS LIABILITY INSURANCE

Aggregate Limits of Indemnity: **USD2,000,000.00**

Policy Holder/Applicant/Insured:

SHENZHEN PKCELL BATTERY CO.,LTD

Territory of Coverage:

Worldwide, including the United States and Canada area.



ISO 9001 Certification



ISO 14001 Certification




IEC Certification



RoHS Certification



Reach Certification

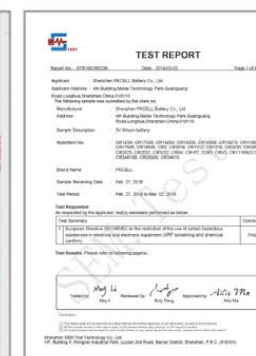

Ultra Digital Alkaline Battery

PKCELL Ultra Digital Alkaline Battery is newly developed by PKCELL R&D team. It is special for high drain devices with more than 10 years' warranty, offer unbeatable performance for digital cameras, music players and electronic games.





LR20-2B

1.5V, D size



Compliance CE ROHS
Packing 2 pcs/pack, 6 packs/box
48 packs/carton
Carton dimension (cm) 35(L) * 25(W) * 22(H)
Gross weight 15kg
Volume 0.0192cbm



LR14-2B

1.5V, C size



Compliance CE ROHS
Packing 2 pcs/pack, 6 packs/box
72 packs/carton
Carton dimension (cm) 31.4(L)*31.5(W)*19.4(H)
Gross weight 11.5kg
Volume 0.0192cbm



LR6-2B

1.5V, AA size



Compliance CE ROHS
Packing 2 pcs/pack, 12 packs/box
144 packs/carton
Carton dimension (cm) 29.4(L) * 26.5(W) * 21(H)
Gross weight 8kg
Volume 0.0168cbm



LR03-2B

1.5V, AAA size



Compliance CE ROHS
Packing 2 pcs/pack, 12 packs/box
144 packs/carton
Carton dimension (cm) 29.4(L) * 26.5(W) * 16.7 (H)
Gross weight 5kg
Volume 0.0130cbm



LR6-4B

1.5V, AA size



Compliance CE ROHS
Packing 4 pcs/pack, 12 packs/box
144 packs/carton
Carton dimension (cm) 33(L) * 29.5(W) * 21(H)
Gross weight 15kg
Volume 0.021cbm



LR03-4B

1.5V, AAA size



Compliance CE ROHS
Packing 4 pcs/pack, 12 packs/box
144 packs/carton
Carton dimension (cm) 29.7(L)*26.5(W)*16.7(H)
Gross weight 8kg
Volume 0.0131 cbm



LR6-12B

1.5V, AA size



Compliance CE RoHS
Packing 12pcs/pack 10pack/box
60pack/carton
Carton dimension (cm) 40.9(L)*37.8(W)*19.6(H)
Gross weight 19.0 Kg
Volume 0.0303 cbm



LR03-12B

1.5V, AAA size



Compliance CE RoHS
Packing 12pcs/pack 10pack/box
60pack/carton
Carton dimension (cm) 40.9(L)*37.8(W)*19.6(H)
Gross weight 10.6 Kg
Volume 0.0303 cbm



6LR61-1B

9V



Compliance CE ROHS
Packing 1 pcs/pack, 10 packs/box
120 packs/carton
Carton dimension (cm) 29.7(L) * 26.8(W) * 19.6(H)
Gross weight 7kg
Volume 0.0156cbm



23A-5B

12V



Compliance CE ROHS
Packing 5 pcs/pack, 20 packs/box
200 packs/carton
Carton dimension (cm) 26.3(L) * 18.8(W) * 31(H)
Gross weight 10kg
Volume 0.0153cbm



27A-5B

12V



Compliance CE ROHS
Packing 5 pcs/pack, 20 packs/box
200 packs/carton
Carton dimension (cm) 26.3(L) * 18.8(W) * 31(H)
Gross weight 5.4kg
Volume 0.0153cbm

> Shrink Wrap Packaging



LR20-2S

1.5V, D size



Compliance CE ROHS
Packing 2 pcs/pack, 3 packs/box
60 packs/carton
Carton dimension (cm) 38(L) * 23(W) * 14.5(H)
Gross weight 22kg
Volume 0.0127cbm



LR14-2S

1.5V, C size



Compliance CE ROHS
Packing 2 pcs/pack, 6 packs/box
120packs/carton
Carton dimension (cm) 42(L) * 23(W) * 12.5(H)
Gross weight 18kg
Volume 0.012cbm



LR6-4S

1.5V, AA size



Compliance CE ROHS
Packing 4 pcs/pack, 15 packs/box
180 packs/carton
Carton dimension (cm) 31(L) * 19(W) * 18(H)
Gross weight 18kg
Volume 0.0106cbm



LR03-4S

1.5V, AAA size



Compliance CE ROHS
Packing 4 pcs/pack, 15 packs/box
300 packs/carton
Carton dimension (cm) 28(L) * 15 (W) * 20.5(H)
Gross weight 15kg
Volume 0.0086cbm



LR6-10S

1.5V, AA size



Compliance CE ROHS
Packing 10 pcs/pack, 5 packs/box
100 packs/carton
Carton dimension (cm) 31(L) * 19(W) * 18(H)
Gross weight 25kg
Volume 0.0106cbm



LR03-10S

1.5V, AAA size



Compliance CE ROHS
Packing 10 pcs/pack, 5 packs/box
100 packs/carton
Carton dimension (cm) 28(L) * 14.5(W) * 20.5(H)
Gross weight 12.5 kg
Volume 0.0083cbm



6LR61-1S

9V



Compliance CE ROHS
Packing 1 pcs/pack, 24 packs/box
288 packs/carton
Carton dimension (cm) 31 (L) * 18(W) * 18(H)
Gross weight 13kg
Volume 0.010cbm

Extra Heavy Duty

PKCELL Zinc Carbon batteries offer a long shelf life as well as reliability, versatility and savings. It is a great choice for small household electronic devices that need continuous power such as calculators, flashlights, clocks, radios, remote controls.



R20P-2B

1.5V, D size

6 942449 520029

Compliance: CE ROHS

Packing: 2 pcs/pack, 6 packs/box, 48 packs/carton

Carton dimension (cm): 35(L) * 25(W) * 22(H)

Gross weight: 9.5 kg

Volume: 0.0192cbm

R14P-2B

1.5V, C size

6 942449 520623

Compliance: CE ROHS

Packing: 2 pcs/pack, 6 packs/box, 72 packs/carton

Carton dimension (cm): 30(L) * 28.5(W) * 21(H)

Gross weight: 7.35kg

Volume: 0.0179cbm

R6P-4B

1.5V, AA size

6 942449 521255

Compliance: CE ROHS

Packing: 4 pcs/pack, 12 packs/box, 144 packs/carton

Carton dimension (cm): 33.5(L)*32.4(W)*20.3(H)

Gross weight: 10.2kg

Volume: 0.0220cbm

R03P-4B

1.5V, AAA size

6 942449 521859

Compliance: CE ROHS

Packing: 4 pcs/pack, 12 packs/box, 144 packs/carton

Carton dimension (cm): 27.6(L)*26.6(W)*20.3(H)

Gross weight: 6kg

Volume: 0.0149cbm

6F22-1B

9V

6 942449 523624

Compliance: CE ROHS

Packing: 1 pcs/pack, 10 packs/box, 120 packs/carton

Carton dimension (cm): 33.5(L) * 27.3(W) * 20.3(H)

Gross weight: 5.75kg

Volume: 0.0186cbm

6F22-1S

9V

6 942449 524010

Compliance: CE ROHS

Packing: 1 pcs/pack, 10 packs/box, 500 packs/carton

Carton dimension (cm): 27.5(L) * 26(W) * 20(H)

Gross weight: 20kg

Volume: 0.0143cbm

> Shrink Wrap Packaging

R20P-2S

1.5V, D size

6 942449 520425

Compliance: CE ROHS

Packing: 2 pcs/pack, 6 packs/box, 120 packs/carton

Carton dimension (cm): 33.5(L) * 30(W) * 22.5(H)

Gross weight: 22kg

Volume: 0.0226cbm

R14P-2S

1.5V, C size

6 942449 521019

Compliance: CE ROHS

Packing: 2 pcs/pack, 6 packs/box, 240 packs/carton

Carton dimension (cm): 33(L) * 22.5(W) * 27(H)

Gross weight: 22kg

Volume: 0.020cbm

R6P-4S

1.5V, AA size

6 942449 521644

Compliance: CE ROHS

Packing: 4 pcs/pack, 10 packs/box, 180 packs/carton

Carton dimension (cm): 24.5(L)*28.8(W)*12.2(H)

Gross weight: 10kg

Volume: 0.0155cbm

R03P-4S

1.5V, AAA size

6 942449 522238

Compliance: CE ROHS

Packing: 4 pcs/pack, 10 packs/box, 300 packs/carton

Carton dimension (cm): 18.9(L)*17.4(W)*24.5(H)

Gross weight: 9.4kg

Volume: 0.0138cbm

Button Cell

PKCELL Button Cell provides stable energy for small electronic devices and is available in lithium, alkaline, silver oxide and zinc air chemistries, depending upon voltage and size requirements of your equipments, widely used for small electronic gadgets, such as car keys, calculators, hearing aids.



> Lithium Button Cell



Item No.	System	Normal Voltage	Capacity (mAh)	Dimension (mm)	Weight (g)	Recommended Continuous Drain (ma)	Recommended Pulse Drain (ma)
CR927	Lithium	3.0	30	9.5x2.7	0.6	0.5	5
CR1216	Lithium	3.0	25	12.5x1.6	0.7	1.0	5
CR1220	Lithium	3.0	40	12.5x2.0	0.9	1.0	5
CR1225	Lithium	3.0	50	12.5x2.5	1.0	2.0	5
CR1616	Lithium	3.0	50	16.0x1.6	1.2	2.0	10
CR1620	Lithium	3.0	70	16.0x2.0	1.6	2.0	10
CR1632	Lithium	3.0	120	16.0x3.2	1.3	2.0	15
CR2016	Lithium	3.0	75	20.0x1.6	1.8	2.0	15
CR2025	Lithium	3.0	150	20.0x2.5	2.4	2.0	15
CR2032	Lithium	3.0	210	20.0x3.2	3.0	3.0	20
CR2032	Lithium	3.0	220	20.0x3.2	3.1	3.0	20
CR2320	Lithium	3.0	130	23.0x2.0	3.0	3.0	20
CR2325	Lithium	3.0	190	23.0x2.5	3.5	3.0	20
CR2330	Lithium	3.0	260	23.0x3.0	4.0	3.0	20
CR2430	Lithium	3.0	270	24.5x3.0	4.5	3.0	20
CR2450	Lithium	3.0	600	24.5x5.0	6.2	3.0	20
CR2477	Lithium	3.0	900	24.5x7.7	7.0	3.0	10
CR2477	Lithium	3.0	1000	24.5x7.7	9.9	3.0	30
CR3032	Lithium	3.0	500	30.0x3.2	6.8	3.0	20

CR2016-5B

3.0V



Compliance CE ROHS
Packing 5 pcs/pack,
30 packs/box
600 packs/carton
Carton dimension(cm)
44(L) * 41(W) * 15(H)
Gross weight 11.8kg
Volume 0.027cbm

Different names of CR series batteries

Name	CR2032	CR2025	CR2016	CR1620	CR1616	CR1225	CR1220	CR1216
Ansi/neda	5004LC	5003LC	5000LC	5009LC	5021LC	5020LC	5012LC	5034LC
Iec	CR2032	CR2025	CR2016	CR1620	CR1616	CR1225	CR1220	CR1216
Duracell	DL2032	DL2025	DL2016	DL1620	DL1616	-----	DL1220	DL1216
Rayovac	CR2032	CR2025	CR2016	CR1620	CR1616	-----	-----	CR1216
Energizer	E-CR2032	E-CR2025	E-CR2016	E-CR1620	E-CR1616	E-CR1225	E-CR1220	E-CR1216
Renata	CR2032	CR2025	CR2016	CR1620	CR1616	CR1225	CR1220	CR1216
Panasonic	CR2032	CR2025	CR2016	CR1620	CR1616	CR1225	CR1220	CR1216
Toshiba	CR2032	CR2025	CR2016	-----	CR1616	-----	CR1220	CR1216
Varta	CR2032	CR2025	CR2016	CR1620	CR1616	-----	CR1220	CR1216
Maxell	CR2032	CR2025	CR2016	CR1620	CR1616	-----	CR1220	CR1216
Gold peak	CR2032	CR2025	CR2016	-----	CR1616	-----	CR1220	-----



CR2016-2B

3.0V
Compliance CE ROHS
Packing 2 pcs/pack, 25 packs/box
1000 packs/carton
Carton dimension (cm)
40.6(L) * 17.2(W) * 28.5(H)
Gross weight 6.6kg
Volume 0.0199cbm



CR2016-1B

3.0V
Compliance CE ROHS
Packing 1pcs/pack, 25 packs/box
1000 packs/carton
Carton dimension (cm)
40.6(L) * 17.2(W) * 28.5(H)
Gross weight 4.8kg
Volume 0.0199cbm



CR2025-5B

3.0V
Compliance CE ROHS
Packing 5 pcs/pack, 30 packs/box
600 packs/carton
Carton dimension (cm)
44(L) * 41(W) * 15(H)
Gross weight 12.8kg
Volume 0.027cbm



CR2025-2B

3.0V
Compliance CE ROHS
Packing 2 pcs/pack, 25 packs/box
1000 packs/carton
Carton dimension (cm)
40.6(L) * 17.2(W) * 28.5(H)
Gross weight 7.9kg
Volume 0.0199cbm



CR2025-1B

3.0V
Compliance CE ROHS
Packing 1 pcs/pack, 25 packs/box
1000 packs/carton
Carton dimension (cm)
40.6(L) * 17.2(W) * 28.5(H)
Gross weight 5.5kg
Volume 0.0199cbm



CR2032-5B

3.0V
Compliance CE ROHS
Packing 5 pcs/pack, 30 packs/box
600 packs/carton
Carton dimension (cm)
44(L) * 41(W) * 15(H)
Gross weight 14.1kg
Volume 0.027cbm



CR2032-2B

3.0V
Compliance CE ROHS
Packing 2 pcs/pack, 25 packs/box
1000 packs/carton
Carton dimension (cm)
40.6(L) * 17.2(W) * 28.5(H)
Gross weight 9.0kg
Volume 0.0199cbm



CR2032-1B

3.0V
Compliance CE ROHS
Packing 1pcs/pack, 25 packs/box
1000 packs/carton
Carton dimension (cm)
40.6(L) * 17.2(W) * 28.5(H)
Gross weight 6.0kg
Volume 0.0199cbm



> Super Alkaline Button Cell



Item No.		Voltage (V)	Capacity (mAh)	Size Dia*H. (mm)	Weight (g)	Chemistry
AG0	LR63/179/521	1.5	10	5.75×2.1	0.28	Alkaline
AG1	LR60/164/621	1.5	13	6.75×2.1	0.28	Alkaline
AG2	LR59/106/726	1.5	28	7.85×2.6	0.44	Alkaline
AG3	LR41/192	1.5	35	7.85×3.5	0.60	Alkaline
AG4	LR66/177/626	1.5	18	6.75×2.5	0.32	Alkaline
AG5	LR48/193/754	1.5	60	7.90×5.4	0.90	Alkaline
AG6	LR69/171/920	1.5	32	9.40×2.1	0.55	Alkaline
AG7	LR57/195/927	1.5	42	9.40×2.5	0.64	Alkaline
AG8	LR55/191/L1120	1.5	45	11.50×2.1	0.79	Alkaline
AG9	LR45/194/936A	1.5	45	9.40×3.5	0.86	Alkaline
AG10	LR54/189/L1130	1.5	75	11.5×3.1	1.18	Alkaline
AG11	LR58/162 /721	1.5	20	7.85×2.1	0.38	Alkaline
AG12	LR43/186	1.5	100	11.50×4.1	1.47	Alkaline
AG13	LR44/A76	1.5	145	11.50×5.4	1.96	Alkaline



AG3-10B

1.5V



Compliance CE ROHS
Packing 10 pcs/pack, 20 packs/box
400 packs/carton
Carton dimension (cm) 44(L) * 37(W) * 13.8(H)
Gross weight 5.45kg
Volume 0.0225cbm



AG4-10B

1.5V



Compliance CE ROHS
Packing 10 pcs/pack, 20 packs/box
400 packs/carton
Carton dimension (cm) 44(L) * 37(W) * 13.8(H)
Gross weight 4.4kg
Volume 0.0225cbm



AG10-5B

1.5V



Compliance CE ROHS
Packing 5 pcs/pack, 20 packs/box
400 packs/carton
Carton dimension (cm) 44(L) * 37(W) * 13.8(H)
Gross weight 6kg
Volume 0.0225cbm



AG10-2B

1.5V



Compliance CE ROHS
Packing 2 pcs/pack, 10 packs/box
400 packs/carton
Carton dimension (cm) 39.5(L) * 16.6(W) * 27(H)
Gross weight 3.8kg
Volume 0.018cbm



AG10-10B

1.5V



Compliance CE ROHS
Packing 10 pcs/pack, 20 packs/box
400 packs/carton
Carton dimension (cm) 44(L) * 37(W) * 13.8(H)
Gross weight 7.8kg
Volume 0.0225cbm



AG13-10B

1.5V



Compliance CE ROHS
Packing 10 pcs/pack, 20 packs/box
400 packs/carton
Carton dimension (cm) 44(L) * 37(W) * 13.8(H)
Gross weight 11kg
Volume 0.0225cbm

Zinc Air Button Cell



Characteristics

- Long Lasting
- Stable operating voltage
- Wide range of operating temperatures

Application

- Hearing aids and accessories

Model	Voltage	Capacity	Dimension		pcs/Blister	pack/Box	pack/CTN	G.W(Kg)	MEASUREMENT(cm)
			Diameter(mm)	Height(mm)					
ZA 10	1.4V	95mAh	5.55-5.8	3.30-3.6	6	10	300	2	38*22*17
ZA 13	1.4V	300mAh	7.65-7.9	5.0-5.4	6	10	300	3.2	38*27*16
ZA 312	1.4V	179mAh	7.55-7.9	3.3-3.6	6	10	300	2.4	38*22*17
ZA 675	1.4V	620mAh	11.35-11.6	5.0-5.4	6	10	300	5.0	38*27*16

Li-SOCL2 Battery

5



Characteristics

- High-voltage(3.6V)
- The specific energy(500wh/kg) and energy density(1000wh/dm³) are very high
- The discharge voltage is very stable
- Wide working temperature range(-55~150°C)
- Self-discharge is very low,the shelf-life can be more than 10 years.

Application

- Water meter,Gas meter,Ammeter
- Memory power for many instrument and meter equipment



Li-SOCl2(Energy Type)										
Model		Nominal Voltage (V)	Dimensions Diameter*Height (MM)	Discharge Characteristics(23°C)				Cut-off Voltage (V)	Weight Approx (g)	Operating Temperature (°C)
GB	IEC			Nominal Capacity (mAh)	Standard Current (mA)	Max Discharge Current				
						Continuous (mA)	Pulse (mA)			
ER14250	1/2AA	3.6	14.5×25.0	1200	0.5	50.0	100	2.0	10	-55~+85
ER14505	AA	3.6	14.5×50.5	2400	1.0	100.0	200	2.0	19	-55~+85
ER17335		3.6	17×33.5	2100	1.0	50.0	200	2.0	30	-55~+85
ER18505	A	3.6	18.5×50.5	4000	1.0	100.0	200	2.0	32	-55~+85
ER26500	C	3.6	26.2×50.5	8500	2.0	200.0	400	2.0	55	-55~+85
ER10450	AAA	3.6	10.0×45.0	800	1.0	10.0	20	2.0	9	-55~+85
ER34615	D	3.6	34.2×61.5	19000	3.0	200.0	400	2.0	107	-55~+85
ER9V	9V	10.8	48.8×17.8×7.5	1200	1.0	50.0	100	2.0	16	-55~+85

Li-SOCl2(Power Type)										
Model		Nominal Voltage (V)	Dimensions Diameter*Height (MM)	Discharge Characteristics(23°C)				Cut-off Voltage (V)	Weight Approx (g)	Operating Temperature (°C)
GB	IEC			Nominal Capacity (mAh)	Standard Current (mA)	Max Discharge Current				
						Continuous (mA)	Pulse (mA)			
ER14250M	1/2AA	3.6	14.4×25.0	750	0.5	100.0	300	2.0	10	-55~+85
ER14505M	AA	3.6	14.5×50.5	1800	1.0	400.0	800	2.0	19	-55~+85
ER17335M		3.6	17.0×33.5	1700	1.0	500.0	1000	2.0	20	-55~+85
ER18505M	A	3.6	18.5×50.5	3000	1.0	600.0	1000	2.0	32	-55~+85
ER26500M	C	3.6	26.2×50.5	6500	2.0	1000.0	1500	2.0	55	-55~+85
ER34615M	D	3.6	34.2×61.5	16500	10.0	2000.0	3000	2.0	106	-55~+85


Lithium Iron Battery

6



Characteristics

- 1.5V equal to alkaline batteries, carbon batteries
- High current discharge
- High capacity
- Wide working temperature range (-20°C to +60°C)
- Self-discharge is very low, shelf life can be 10 years



Application

Camera, MP3/MP4, flashlight, Remote Controller, Children Toy, Electronic Products



Model	Size	Jacket	Volt.	Capacity(mAh)	Pcs/Blister	Pcs/Box	Pcs/CTN	N.W(kg)	G.W(kg)	CBM
FR6	AA	Alu foil	1.5V	2900	2	24	288	5.1	6.1	33.5*27.3*20.3cm
					4	48	576	9.5	10.5	33.5*32.4*20.3cm
FR03	AAA	Alu foil	1.5V	1200	2	24	288	2.8	3.8	27.6*26.6*20.3cm
					4	48	576	4.3	5.3	27.6*26.6*20.3cm
FR6	AA	Alu foil	1.5V	2900	Bulk	50	720	12.1	13.1	31*19*18cm
FR03	AAA	Alu foil	1.5V	1200	Bulk	50	1000	7.7	8.7	28*24*14cm

Li/MnO2 Battery



Characteristics

- High-voltage(3V)
- Suitable for large current
- Low self-discharge rate
- Wide working temperature range (-40~85°C)
- Stable discharge voltage
- Excellent leakage-proof
- Excellent safety characteristics

Model	Jacket	Voltage	Max Diameter(mm)	Max Height(mm)	Capacity (mAh)	pcs/Blister	pcs/Box	pack/CTN	G.W(Kg)	MEASUREMENT(cm)
CR17345(CR123A)	PVC	3.0V	17	34.5	1500mAh	1	8	96	3	27.5*26*21
CR15H270(CR2)	PVC	3.0V	15.6	27.0	850mAh	1	8	96	2.5	27.5*26*21



Rechargeable Products Series


- Ready To Use Battery
- NiMH Rechargeable Battery
- Lithium Ion Battery




Ready To Use Battery

Energy Retention Over Storage Period

Already Charged Ready For Use!

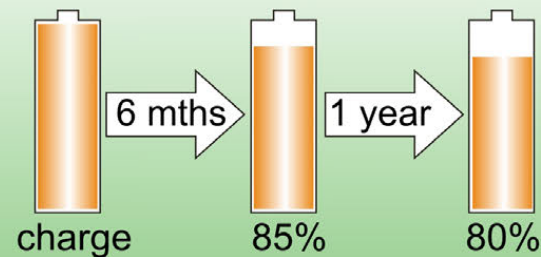

standard Ni-MH

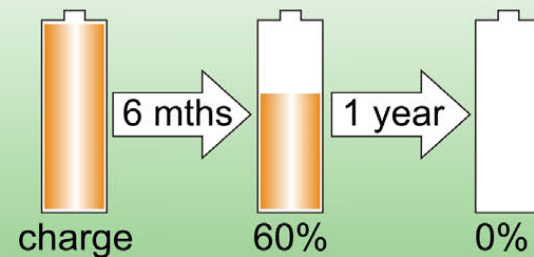

Ni-MH
AA2600-4B



Compliance CE ROHS
Packing 4 pcs/pack, 12 packs/box
144 packs/carton
Carton dimension (cm) 33.5(L)*27.3(W)*20.3(H)
Gross weight 18.7kg
Volume 0.0186cbm



Ni MH
AA2600-2B



Compliance CE ROHS
Packing 2 pcs/pack, 12 packs/box
144 packs/carton
Carton dimension (cm) 33.5(L)*27.3(W)*20.3(H)
Gross weight 10kg
Volume 0.0186cbm



Ni-MH
AA600-4B



Compliance CE ROHS
Packing 4 pcs/pack, 12 packs/box
144 packs/carton
Carton dimension (cm) 33.5(L)*27.3(W)*20.3(H)
Gross weight 8.6kg
Volume 0.0186cbm



Ni-MH
AA600-2B



Compliance CE ROHS
Packing 2 pcs/pack, 12 packs/box
144 packs/carton
Carton dimension (cm) 33.5(L)*27.3(W)*20.3(H)
Gross weight 6kg
Volume 0.0186cbm



Ni-MH
AAA1000-4B



Compliance CE ROHS
Packing 4 pcs/pack, 12 packs/box
144 packs/carton
Carton dimension (cm) 27.6(L)*26.6(W)*20.3(H)
Gross weight 9.25kg
Volume 0.015cbm



Ni-MH
AAA1000-2B



Compliance CE ROHS
Packing 2 pcs/pack, 12 packs/box
144 packs/carton
Carton dimension (cm) 27.6(L)*26.6(W)*20.3(H)
Gross weight 5.2kg
Volume 0.015cbm



Ni-MH
AAA600-4B



Compliance CE ROHS
Packing 4 pcs/pack, 12 packs/box
144 packs/carton
Carton dimension (cm) 27.6(L)*26.6(W)*20.3(H)
Gross weight 7.3kg
Volume 0.015cbm



Ni-MH
AAA600-2B



Compliance CE ROHS
Packing 2 pcs/pack, 12 packs/box
144 packs/carton
Carton dimension (cm) 27.6(L)*26.6(W)*20.3(H)
Gross weight 4.7kg
Volume 0.015cbm



Ni-MH
250mAh-1B
9V



Compliance CE ROHS
Packing 1 pcs/pack, 10 packs/box
120 packs/carton
Carton dimension (cm) 33.5(L)*27.3(W)*20.3(H)
Gross weight 7.5kg
Volume 0.0186cbm

8

NiMH Rechargeable battery

PKCELL Ni-MH Rechargeable batteries offer high capacity performance, produce less waste than disposable batteries & enable energy and raw material savings. Good for all applications: Digital camera, portable video, game, flashlight, remote control, toy, MP3/MP4 player, electric razor.



Ni-MH AA2800mAh-4B
1.2V, AA size
Compliance CE ROHS
Packing 4 pcs/pack, 12 packs/box
144 packs/carton
Carton dimension (cm) 33.5(L) * 27.3(W) * 20.3(H)
Gross weight 19.6kg
Volume 0.0186cbm



Ni-MH AA2800mAh-2B
1.2V, AA size
Compliance CE ROHS
Packing 2 pcs/pack, 12 packs/box
144 packs/carton
Carton dimension (cm) 33.5(L) * 27.3(W) * 20.3(H)
Gross weight 10kg
Volume 0.0186cbm



Ni-MH AA1300mAh-4B
1.2V, AA size
Compliance CE ROHS
Packing 4 pcs/pack, 12 packs/box
144 packs/carton
Carton dimension (cm) 33.5(L) * 27.3(W) * 20.3(H)
Gross weight 14.3kg
Volume 0.0186cbm



Ni-MH AA1300mAh-2B
1.2V, AA size
Compliance CE ROHS
Packing 2 pcs/pack, 12 packs/box
144 packs/carton
Carton dimension (cm) 33.5(L) * 27.3(W) * 20.3(H)
Gross weight 8.2kg
Volume 0.0186cbm



Ni-MH AA600mAh-4B
1.2V, AA size
Compliance CE ROHS
Packing 4 pcs/pack, 12 packs/box
144 packs/carton
Carton dimension (cm) 33.5(L) * 27.3(W) * 20.3(H)
Gross weight 9.8kg
Volume 0.0186cbm



Ni-MH AA600mAh-2B
1.2V, AA size
Compliance CE ROHS
Packing 2 pcs/pack, 12 packs/box
144 packs/carton
Carton dimension (cm) 33.5(L) * 27.3(W) * 20.3(H)
Gross weight 4.9kg
Volume 0.0186cbm



Ni-MH AAA1200mAh-4B
1.2V, AAA size
Compliance CE ROHS
Packing 4 pcs/pack, 12 packs/box
144 packs/carton
Carton dimension (cm) 27.6(L) * 26.6(W) * 20.3(H)
Gross weight 5kg
Volume 0.0150cbm



Ni-MH AAA1200mAh-2B
1.2V, AAA size
Compliance CE ROHS
Packing 2 pcs/pack, 12 packs/box
144 packs/carton
Carton dimension (cm) 27.6(L) * 26.6(W) * 20.3(H)
Gross weight 10kg
Volume 0.0150cbm



Ni-MH AAA600mAh-4B
1.2V, AAA size
Compliance CE ROHS
Packing 4 pcs/pack, 12 packs/box
144 packs/carton
Carton dimension (cm) 27.6(L) * 26.6(W) * 20.3(H)
Gross weight 7.3kg
Volume 0.0150cbm




Ni-MH AAA600mAh-2B
1.2V, AAA size
Compliance CE ROHS
Packing 2 pcs/pack, 12 packs/box
144 packs/carton
Carton dimension (cm) 27.6(L) * 26.6(W) * 20.3(H)
Gross weight 4.7kg
Volume 0.0150cbm



Ni-MH 9V250mAh-1B
9V
Compliance CE ROHS
Packing 1 pcs/pack, 10 packs/box
120 packs/carton
Carton dimension (cm) 33.5(L) * 27.3(W) * 20.3(H)
Gross weight 7kg
Volume 0.0186cbm

Nickel-Zinc Battery

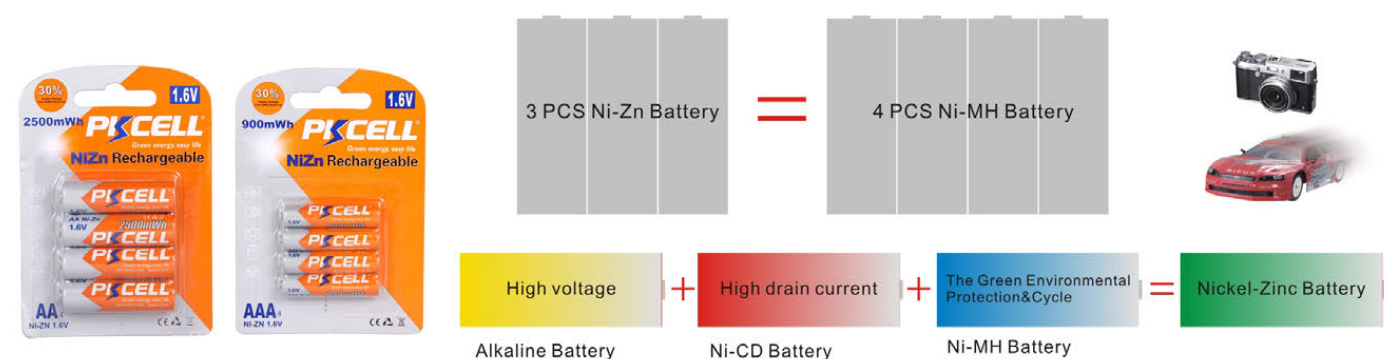

Model/EC	Nominal Voltage (V)	Dimensions(D*H)	Max continuous discharge current(mWh)	Cut-off Voltage (V)	Weight Approx (g)	Operating Temperature (°C)
Ni-ZN AA 2500mWh	1.6V	14.5x50.5	5000mWh	1.2	25	-20~+65
Ni-ZN AAA 900mWh	1.6V	10.0x44.5	1800mWh	1.2	11	-20~+65

Model	Size	Jacket	Volt.	Capacity(mWh)	Pcs/Blister	Pcs/Box	Pcs/CTN	N.W(kg)	G.W(kg)	CBM
Ni-Zn AA	AA	Alu foil	1.6V	2500	2	24	288	7	8	33.5*27*20.3cm
					4	48	576	14.8	15.8	33.5*32.5*20.3cm
Ni-Zn AAA	AAA	Alu foil	1.6V	900	2	24	288	3	4	27.6*26.6*20.3cm
					4	48	576	6.8	7.8	27.6*26.6*20.3cm
Ni-Zn AA	AA	Alu foil	1.6V	2500	Bulk	50	720	17.5	18.5	33*25*22cm
Ni-Zn AAA	AAA	Alu foil	1.6V	900	Bulk	50	1000	12.5	13.5	30*28.5*21cm

Lithium Ion Battery



Characteristics

- High Energy Density
- Green Energy and pollution-free
- Long cycle life.more than 500 cycles
- No Memory effect

Application

- Flash light,laptop,portabel DVD,speaker, toys,video camera,Robot,etc.



Model	Nominal Voltage	Capacity	Dimension		Weight Approv(g)
			Diameter(mm)	Height(mm)	
ICR 18650	3.7V	2200mAh	18.5	65.5	45
ICR 18650	3.7V	2600mAh	18.5	65.5	46
ICR 18650	3.7V	3000mAh	18.5	65.5	48
ICR 18650	3.7V	3400mAh	18.5	65.5	49
ICR 26650	3.7V	4500mAh	26.5	65.2	56

Battery charger

Proper charging of Nickel-Metal Hydride (NiMH) batteries is important to optimize performance in any product. PKCELL® offers a wide range of chargers to meet the needs of our customers in terms of special features and price.

> Fast Charger

8152

Charges:

- 1-4 x AA
- 1-4 x AAA

NI-MH

NI-CD



PACKING

Packing: 1pcs/pack, 32 packs/carton
Carton dimension (cm): 50.5(L) * 48.5(W) * 30(H)
Gross weight: 6.5kg Volume: 0.0735cbm



AVAILABLE COLORS

White

MAIN FEATURES

- Certificate: CE, ROHS, ETL
- Suitable for 1to 4pcs AA/AAA NI-MH/NI-CD batteries.
- The high sensitivity -dv detector stops charging once it detects the batteries are fully charged.
- Defective and Non-rechargeable battery detection.
- Reverse polarity protection.
- Timer control protection
- Voltage control charging
- Short circuit protection
- Low battery leakage current
- Trickle charge after full charge
- Charging indicators: LCD
- Pulse charging Feature.

SPECIFICATION

Input: AC 100-240V, 50/60HZ
Output: DC 4* 1.4V
AA—400ma (for 1 or 2 batteries)
--260ma (for 3 batteries)
--200ma (for 4 batteries)
AAA—200ma (for 1 or 2 batteries)
--130ma (for 3 batteries)
--100ma (for 4 batteries)
Trickle charge: AA@16ma, AAA@8ma

8154

Charges:

- 1-4 x AA
- 1-4 x AAA

NI-MH

NI-CD



MAIN FEATURES

- Certificate: CE, ROHS, ETL
- Suitable for 1to 4pcs AA/AAA NI-MH/NI-CD batteries.
- The high sensitivity -dv detector stops charging once it detects the batteries are fully charged.
- Timer Control Protection: The charger automatically detects the correct charging time and main charging current changes to a trickle current.The charger always shuts off the main charging current and switches to trickle charge after about 7 hours.
- Over Temperature Protection (up to 55 °C)
- Defective and Non-rechargeable battery detection
- Low Battery Leakage Current
- Trickle Charge After Full Charge
- Short Circuit Protection
- Charging Indicators
- Red LED on: Charging, Green LED on: Fully charged and trickle charging.
- Red LED Flashing: Defective batteries or Non-rechargeable battery Short circuit
- Pulse Charging Feature

AVAILABLE COLORS

White

SPECIFICATION

Input: AC 100-240V, 50/60HZ
Output: DC 4* 1.4V
AA—1000ma (for 1 or 2 batteries)
--500ma (for 3 or 4 batteries)
AAA—600ma (for 1 or 2 batteries)
--300ma (for 3 or 4 batteries)
Trickle charge: AA@50ma, AAA@30ma.

PACKING

Packing: 1pcs/pack, 32 packs/carton
Carton dimension (cm): 50.5(L) * 48.5(W) * 30(H)
Gross weight: 6.5kg Volume: 0.0735cbm

Includes:



> Standard Charger

8126

Charges:

1-2 x AA

NI-MH

1-2 x AAA

NI-CD

MAIN FEATURES

- Certificate: CE, ROHS, ETL
- 1-2pcs AA/AAA NI-MH/NI-CD
- The LEDs show the charging situation of the batteries
- The LED would not turn on
- World wide voltage input.



Includes:



PACKING

Packing: 1pcs/pack, 32 packs/carton
Carton dimension (cm): 50.5 (L)*35(W)*18(H)
Gross weight: 3.2 kg Volume: 0.0318cbm

SPECIFICATION

Input: AC 100V-240V 50/60HZ
Output: DC 1.2V 150ma*2
150ma*1

AVAILABLE COLORS

Black



Promotional Accessories




Note book Pen



T-shirt



Bags

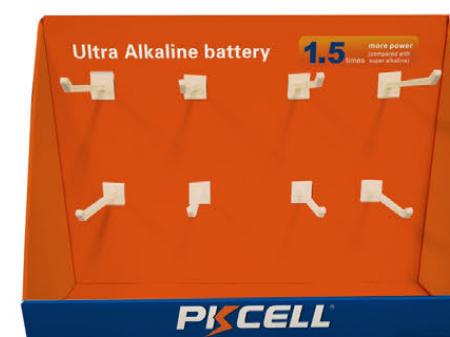


Display



Box



Flash light

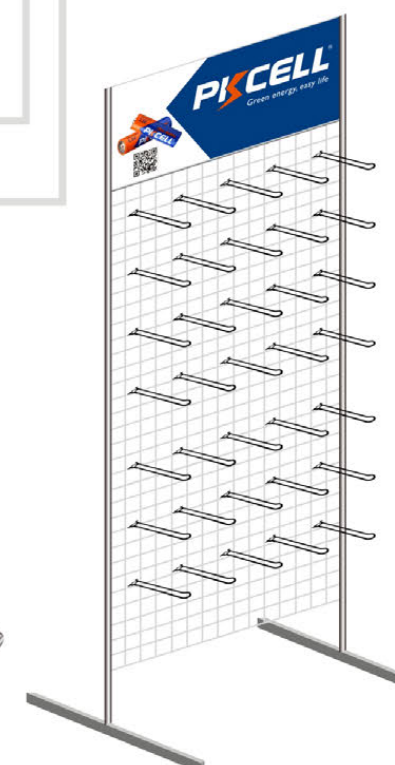

small battery stand



Inner box

8174

Charges:

1-4 x AA

NI-MH

1-4 x AAA

NI-CD

MAIN FEATURES

- Certificate: CE, ROHS,
- 2 or 4pcs AA/AAA NI-MH/NI-CD rechargeable batteries.
- The LEDs show the charging situation of the batteries.
- The LED would not turn on.
- World wide voltage input.



Includes:



PACKING

Packing: 1pcs/pack, 30 packs/carton
Carton dimension (cm): 43.3(L)*35(W)*24(H)
Gross weight: 3.4kg Volume: 0.076cbm

SPECIFICATION

Input: AC 100-240V, 50/60HZ
Output: DC 2.4V 200ma*4 200ma*2

AVAILABLE COLORS

Silver

8182

Charges:

1-4 x AA

NI-MH

1-4 x AAA

NI-CD

MAIN FEATURES

- Certificate: CE, ROHS
- 1-4pcs AA/AAA/D/C NI-MH/NI-CD and 2pcs of 9V rechargeable batteries.
- The LEDs show the charging situation of the batteries.
- The LED would not turn on.
- World wide voltage input.



Includes:



PACKING

Packing: 1pcs/pack, 20 packs/carton
Carton dimension (cm): 51(L) * 34(W) * 22(H)
Gross weight: 12kg Volume: 0.038cbm

SPECIFICATION

Input: AC 100V-240V 50/60HZ
Output: DC 1.2V D/C/AA/AAA
150ma*4, 9V 25ma

AVAILABLE COLORS

Silver

Partners

we are recruiting agents all over the world



- | | | | | | |
|--|--|--|---|--|---|
| • North America <ul style="list-style-type: none"> • Canada • U. S. A | • Caribbean/ Latin America <ul style="list-style-type: none"> • Argentina • Brazil • Bolivia • Chile • Colombia • Costa Rica • Cuba • Dominica • Ecuador • EL Salvador • Guatemala • Haiti • Mexico • Nicaragua • Panama • Paraguay • Peru • Puerto Rico • Trinidad and Tobago • Uruguay • Venezuela | • Middle East /Africa <ul style="list-style-type: none"> • Algeria • Benin • Egypt • Iran • Israel • Kuwait • Lebanon • Sierra Leone • Saudi Arabia • Syria • S. Africa • Tunisia • U.A.E. • Uganda | • Europ <ul style="list-style-type: none"> • Austria • Albania • Andorra • Belarus • Belgium • Bosnia • Bulgaria • Czech Republic • Croatia • Cyprus • Denmark • Estonia • Finland • France • Germany • Georgia • Greece • Hungary • Iceland • Ireland • Italy • Latvia • Lithuania • Luxembourg • Macedonia • Malta • Netherland • Norway • Portugal • Poland • Romania • Russia • Serbia • Slovakia • Slovenia • Spain • Sweden • Switzerland • Turkey • United Kingdom • Ukraine | • Asia <ul style="list-style-type: none"> • Afghanistan • Armenia • Azerbaijan • Bangladesh • Cambodia • China • Hong Kong • Indonesia • India • Iraq • Japan • Jordan • Korea • Kazakhstan • Lao • Malaysia • Pakistan • Philippines • Singapore • Sri Lanka • Taiwan • Thailand • Turkmenistan • Vietnam • Yemen | • Oceania <ul style="list-style-type: none"> • Australia • Fiji • New Zealand |
|--|--|--|---|--|---|



Being a **leading and respected** enterprise in the field of power solution.

Future

